

## Fiber Cassettes and Chassis

DoDoc: 03092004

### Bare Fiber Cassettes, with 1U and 6U Chassis

#### Features


- Rack Mountable Chassis (1U for up to 2 cassettes, 6U for up to 10 cassettes)
- Rugged cassette construction protects internal fiber reels
- One-year warranty on all assemblies
- 100% of connectors tested for insertion loss and back-reflection
- 100% of connectors visually inspected at 400x magnification
- Test results available upon request

#### Specifications

- Operating Wavelengths are 1550nm for Singlemode or 850nm for Multimode
- Operation Temperature is  $-40^{\circ}\text{C}$  to  $+80^{\circ}\text{C}$
- Fiber is either Singlemode (8.3/125 $\mu\text{m}$ ) or Multimode (62.5/125 $\mu\text{m}$  or 50/125 $\mu\text{m}$ )
- Custom fiber is available upon request
- Fiber lengths are available in standard increments of 100 meters
- Maximum fiber length per cassette is 3000 meters
- Custom fiber lengths are available upon request
- Insertion Loss is determined by configuration, (fiber type and length)
- Connector Insertion Loss: typical 0.20dB / maximum 0.35dB for ST, SC or FC connectors
- Custom designs also available



Interior view of cassette and fiber reel

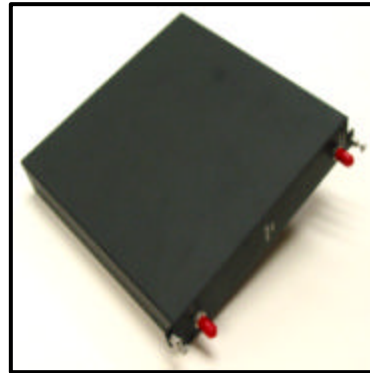

Individual bare fiber cassette



1U Rack Mountable Chassis  
(holds 2 cassettes)



6U Rack Mountable Chassis  
(holds 10 cassettes)