

## MODEL NUMBER CONFIGURATION CHART - DP-525, DP-700 AND DP-105

DPXXX	X	XX	XXX	
MODEL	PACK STYLE	ADAPTER PLATE QUANTITY	ADAPTER STYLE	
DP 525*	S = 6 Packs	01 = 1 Adapter Plate	STS = ST Singlemode	
DP 700*	E = 8 Packs	02 = 2 Adapter Plates	STM = ST Multimode	
DP 105*	T = 12 Packs*	03 = 3 Adapter Plates	FCS = FC Singlemode, Bulkhead	
		04 = 4 Adapter Plates	FCA = FC Angle	
		05 = 5 Adapter Plates	SCS = SC Singlemode	
		06 = 6 Adapter Plates	SCA = SC Angle	
		07 = 7 Adapter Plates	SCM = SC Multimode	
		08 = 8 Adapter Plates	LCS = LC Singlemode	
		09 = 9 Adapter Plates	LCM = LC Multimode	
		10 = 10 Adapter Plates	SDS = SC Duplex Singlemode	
		11 = 11 Adapter Plates	SDM = SC Duplex Multimode	
		12 = 12 Adapter Plates	LDS = LC Duplex Singlemode	
				LDM = LC Duplex Multimode

### \*CAPACITY:

DP-525 accepts 1-6 Adapter Plates

DP-700 accepts 1-12 Adapter Plates

DP-105 accepts 1-12 Adapter Plates

DP-105 accepts 12 Pack Plates Only


**Example: DP525 - S06SCS** = DPC-525 Distribution Enclosure loaded with 6-Pack Plates (S), quantity 6 (06), SC-Singlemode Adapters (SCS)

Note: Configuration chart lists most commonly requested options. For additional configuration options, please contact customer service at 1.866.624.0344


## FEATURES & BENEFITS

Dimensions:  
H x 17.0"W x 11.0" D


DP-525

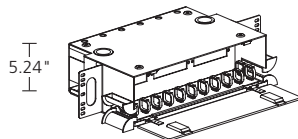

DP-700

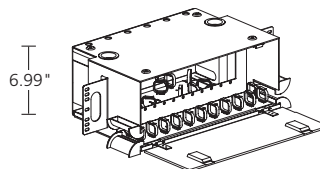

DP-105

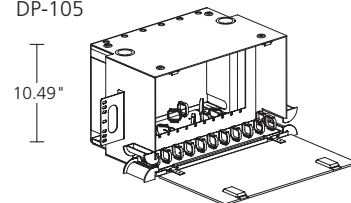

- DP-525 and DP-700 accept LGX compatible 6- or 8-pack adapter plates
- DP 105 accepts 12-pack adapter plates
- 19" and 23" rack mounting
- Constructed of high-strength aluminum
- Removable hinged front doors and hinged rear door
- Large cable management rings for enhanced jumper routing
- Stackable for custom applications
- Cable clamp kits for additional cable strain relief
- Grounding kit available
- Metal door & key lock options for increased security