

Fiber Demarcation Terminal (FDT)

Outdoor Enclosures

Fiber Demarcation Terminal (FDT) Series Wallmount Enclosures are compact and weatherproof modular enclosures.

Supports for waterproof flexible conduit entry, pole mounting, and provides more space for cable management.

IP66 rated design prevents water and dust intrusion.


The rugged plastic housing cover closes securely with snap latches and has a provision for a padlock.



Features

- Compact and space efficient pole mountable design
- Gray UV resistant PC and ABS material
- Hinged and gasketed lid fits securely on the base providing a water and dust proof seal (IP66 Rated)
- Pad lockable lid closes securely with snap latches
- Cost-effective design with premium features

Loaded Example

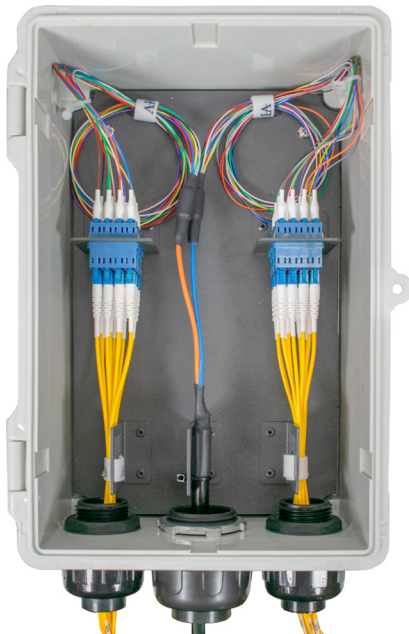

IP66 Rated

Solid Particle Protection
IP First Digit Rating Level: 6
 Totally protected against dust ingress (dust-tight).

Liquid Ingress Protection
IP Second Digit Rating Level: 6
 Protected against high pressure water jets from any direction.



Specifications

Dimensions (Inches)	11.4 x 7.5 x 5.5 (HxWxD)
Patch/Pre-Term Capacity	12 Fibers SC, 24 Fibers LC, or 72 Fibers MPO
Standard Config. Cable Entry Openings	(3) 1.10
Conduit Ready Config. Cable Entry Openings	(2) 1.38" and (1) 1.73"
Material	ABS + PC Plastic
Material Finish	Light Gray
Weight (Empty) (lbs)	N/A



Fiber Demarcation Terminal (FDT)

Outdoor Enclosures

Accessories



Medium Compression Fitting Supports Cable O.D.: 0.29"-0.60"
For Standard Config. (P/N: CF-MD)



Three Slot Flat Drop Compression Fitting with Removable Spacers
For Standard Config.(P/N: CF-3S-FD)



Flat Drop Compression Fitting For Standard Config.
P/N: N3/4"B-H1-(8.1*4.5)



Threaded Plug and Locknut
(See Part Number)



Liquid Tight Compression Fitting for Flex Non-Metallic Conduit Size NPT 1
For Conduit Ready Config.
P/N: CF-FLCND-1



Liquid Tight Compression Fitting for Flex Non-Metallic Conduit Size NPT 1-1/4
For Conduit Ready Config.
P/N: CF-FLCND-1-1-4



15" Diameter Pole Mount Straps For Use with Pole Mount Bracket
P/N: PMB-STRAPS



Pole Mount Bracket
P/N: FDM1929-PMB

Part Number

FDT- - - - -

1 2 3 4 5

1 Cable Entry Configuration

C = Flex Non-Metallic Conduit
S = Standard

3 Adapter Type

SC = SC
LC = LC

4 Adapter Count

XX = XX Fibers

2 Cable Entry Fittings

Leave Blank for Standard Grommets

X THP = X Threaded Hole Plugs
X MCF = X Medium Compression Fittings
X FCF = X Flat Drop Compression Fittings
X 3CF = X 3 Slot Flat Drop Compression Fittings
X N10 = X Compression Fittings for NPT 1
X N14 = X Compression Fittings for NPT 1-1/4

3 Polish Type

U = UPC
A = APC

5 Pole Mounting

Leave Blank for no Pole Mounting Hardware

PMB = Pole Mount Bracket Included
PMK = Pole Mount Bracket, Straps, and Screws